

Print Floor

Printable, soft-sided graphic floor for short term use.

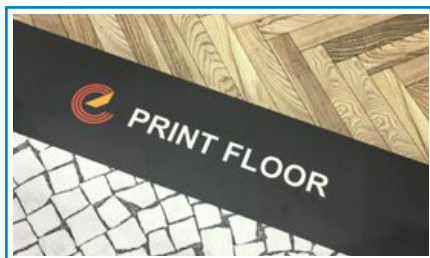
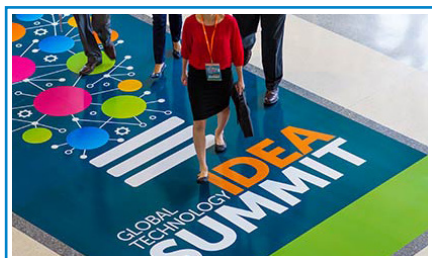


BILD PART NUMBER: BPMEPF126X115

DESCRIPTION: ENDUTEX Print Floor 126" x 115"

MATERIAL: PVC Coated Polyester Woven Fabric

COMPOSITION: 85% PVC
15% Polyester

WIDTH:	cm	315
	Inches	122

Technical Specs Sheet

Characteristic	Specification	Method
Thickness (mm)	2.20 ± 0.20	
Total Mass (g/m ²)	1050 ± 100	EN ISO 2286-2
Fabric Mass (g/m ²)	145 ± 10 EN ISO	2286-2
Breaking Load (daN/50mm)	L.: 160 T.: 90	EN ISO 1421
Breaking Extension (%)	L.: 20 T.: 25	EN ISO 1421
Tear Strength (daN)	L.: 3.0 T.: 3.0	EN ISO 4674-1B
Coating Adhesion (daN/50mm)	min 5.0	EN ISO 2411
Dimensional Stability (%)	L.: < 2.0 T.: < 2.0	6h at 80°C
Slip Resistance	Class DS	EN 13893
Slip Resistance	R9	DIN 51130
Burning Behavior	B _{fl} -s1	EN 13501

L-Along T-Across

This technical data sheet is not legal binding and is based on average results from current production. Unless otherwise stated, values cannot be considered as minimum to be satisfied. Purchaser is fully responsible for determining the product suitability for its intended application. Technical details are subject to change without prior notice so please contact our technical service for any additional information you may require. Inches rounded down to the nearest whole number. Updated: 2019/06/06

a product of **ENDUTEX**