

Terra OPAK

Two-sided blackout fabric

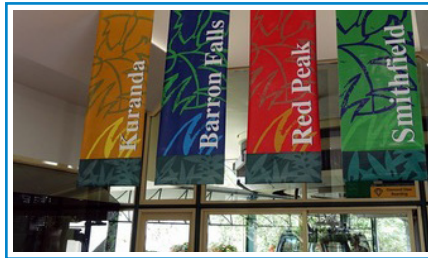


BILD PART NUMBER: BPMETO63X164

DESCRIPTION: Endutex Terra Opak 300 FR 63" x 164'

MATERIAL: Polyurethane Coated Polyester Woven Fabric

COMPOSITION: 51% Polyurethane
49% Polyester

WIDTH:	cm	160	320
	Inches	62	126

Technical Specs Sheet

Characteristic	Specification	Method
Thickness (mm)	0.30	
Total Mass (g/m ²)	340 ± 30	EN ISO 2286-2
Fabric Mass (g/m ²)	165 ± 15	EN ISO 2286-2
Breaking Load (daN/50mm)	L.: 150 T.: 85	EN ISO 1421
Tear Strength (daN)	L.: 20 T.: 13	DIN 53363
Burning Behavior	B1	NF P92-503
	B _s 1 d0	EN 13501-1
	B1	DIN 4102

L-Along T-Across

This technical data sheet is not legal binding and is based on average results from current production. Unless otherwise stated, values cannot be considered as minimum to be satisfied. Purchaser is fully responsible for determining the product suitability for its intended application. Technical details are subject to change without prior notice so please contact our technical service for any additional information you may require. Inches rounded down to the nearest whole number. Updated: 2017/01/18

a product of **ENDUTEX**

BILD PRINT MEDIA

www.btlc.com/bild
9736 Legler Road, Lenexa, KS 66219
913-894-0403 | customerservice@btlc.com