



Commercial and Industrial Grade

POLYVINYL FLOORING

The Solid Ceramic™ series with MicroLock Technology™ anti-microbial satin top coat is suitable for a wide range of commercial and industrial applications. It can be used as a free floating temporary floor for on-site clinics and popup events, or as a permanent flooring option. This material is specifically designed for high traffic applications. G-Floor® Roll-Out Flooring is UV sanitized during manufacturing, includes our toughest MicroLock Technology™ top coat, and is easy to clean.

Product Information

Surface Texture: Ceramic™

Color: Absolute White, Midnight Black, Slate Grey

Overall Thickness: 50 mil (0.050")

Roll Size: 10' x 61'

Weight: 4 oz/sq ft

Finish: MicroLock Technology™ Anti-Microbial Satin Top Coat

Warranty: G-Floor® offers a limited lifetime warranty. See warranty for more details.

Product Composition


MicroLock Technology™ Top Coat



- Seals Surface for Easy Clean Up
- Reduces Staining
- Anti-Microbial / Anti-Fungal
- Improved UV Resistance
- Keeps Floor Looking Like New

Durable, Embossed Surface Texture

Waterproof, 100% Polyvinyl Wear Layer

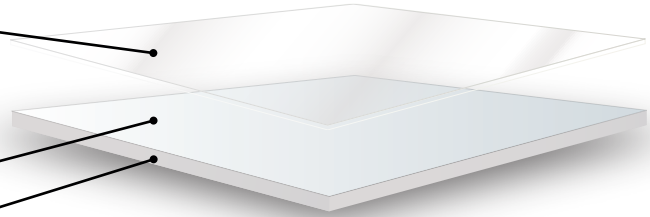

Technical Specifications

TEST	OUTCOME
Tensile Strength ASTM D412	Pass > 800 PSI
Flame Spread FMVSS 302	Pass Did not Ignite / Self Extinguishing
Abrasion Resistance ASTM D2240	Pass Weight loss after 1,000g = 0.06g Weight loss after 5,000g = 0.013g
Coefficient of Friction ASTM C1028	Pass Dry - 0.97 Wet - 0.91
Slip Resistance B101.3	Pass
Hardness ASTM D2240	Pass 90+_ 5 Shore A
Critical Radiant Flux ASTM E648	Pass 0.5 Watts/cm ²
Static Load ASTM F970	Pass 1000 psi
Residual Indentation ASTM F1914	Pass 250 psi 0.006"
Chemical Resistance ASTM F925	Pass After 24 Hours, little to no change (Chemicals Tested: ammonia, bleach, inks & markers, crayons, black scuff marks, gum, rock salt, synthetic snow melt, acetic acid, wax stripper, asphalt sealer, roofing tar)



AMERICAN OWNED
AMERICAN MADE

A Product of Better Life Technology
9736 Legler Rd • Lenexa, KS 66219 • 913.894.0403
WWW.BLTLLC.COM